

TECHNICAL DATA **AD** SERIES



ARNETT
ENGINEERED SOLUTIONS

ARNETT ENGINEERED SOLUTIONS
61 INNOVATION DRIVE, BAMBERG, SC 29003
(844) 785-7585 | SALES@ARNETT.COM

WWW.ARNETT.COM

UNIDIRECTIONAL KNIFE GATE VALVE

DESCRIPTION

- One piece cast body with guides to support gate and seat wedges.
- Provides high flow rates with low pressure drop.
- Various seat and packing materials available.
- Face to face dimension in accordance with **CMO Valves** standard.
- An arrow is marked on the body indicating the flow direction.

GENERAL APPLICATIONS

This knife gate valve is suitable for liquids that contain a maximum of 5% suspended solids. If it is used for dry solids in gravity feed applications it should be installed with the arrow on the body pointing in the opposite direction to the flow.

Designed for applications such as:

- Paper Industry
- Mining
- Silo emptying
- Chemical plants
- Pumping
- Food Industry
- Sewage treatment.

SIZES

DN80 to DN1200.

** Others **ND** on request.*

WORKING PRESSURE (ΔP)

DN80 - DN250	10 bar
DN300 - DN400	6 bar
DN450	5 bar
DN500 - DN600	4 bar
DN700 - DN1200	3 bar

** Otras presiones, consultar.*

The mentioned working pressures are just valid for the pressures applied on the direction of the arrow marked on the body. As the valve is designed with gate support guides, the valves are able to support a 30% of these pressures from the opposite direction without any damage on them. In these cases, the valves are not 100% water tight. To obtain total water tightness in these conditions, it is necessary to incorporate additional supports..

STANDARD FLANGES

- EN1092 PN10.
- ASME B16.5 (class 150).

OTHER COMMON FLANGES

- PN6.
- PN16.
- PN25.
- BS "D" & "E".
- JIS10K.

** Others on request*



Fig. 1

APPLICATION OF EUROPEAN DIRECTIVES

See document of European Directives applicable to **CMO Valves**.

** For category and zone information, contact technical-commercial department at **CMO Valves**.*

QUALITY DOSSIER

All valves are tested hydrostatically at **CMO Valves** and material and test certificates can be provided.

- Body test = working pressure x 1.5
- Seat test = working pressure x 1.1

ADVANTAGES

When a knife gate valve remains open for extended periods of time and the internal walls of the body are parallel, a very large operating torque is required to close it. The interior of the **AD series** knife gate valve body has a conical shape, which provides a larger internal space, allowing any solids stored inside to be easily released when the valve is closed.

This valve is defined as unidirectional and in unidirectional valves, there is a risk of the knife gate bending and deforming due to the presence of opposing pressure. This does not occur with the **CMO Valves' AD series** valve, as the valve body internally has sliders that support the knife gate and allow it to work under a back pressure of 30% of the maximum working pressure, without the knife gate bending and deforming.

The stem in **CMO Valves** is manufactured in AISI304 stainless steel. This is another additional benefit, since some manufacturers supply it with 13% chrome, which quickly rusts. Other materials are available upon request.

The stem protection cap is independent from the handwheel's fastening nut, meaning the bonnet can be disassembled without the need to release the handwheel. This advantage allows regular maintenance operations to be performed, such as lubricating the stem, etc.

The operating handwheel is made from nodular cast iron, this material exhibits superior mechanical properties compared to standard grey cast iron handwheels, which are much more prone to breakage in the event of a very high operating torque or impacts.

The yoke has a compact design with the bronze actuator nut protected in a sealed and lubricated box. This provides the possibility of being able to move the valve with a key, and even without a handwheel (this is not possible with other manufacturers).

STANDARD COMPONENTS LIST

COMPONENT	NODULAR IRON	ST.STEEL
1 BODY	GJS500-7	CF8M
2 GATE	AISI304	AISI316
3 GUIDE	PA6	
4 PACKING GLAND	GJS500-7	CF8M
5 PACKING	SYNT + PTFE	SYNT + PTFE
6 O-RING SEAL	EPDM	
7 SUPPORT PLATES	S275JR	
8 RING	AISI316	
9 SEAT	EPDM	
10 STEM	AISI303	
11 YOKE	STEEL	
12 STEM NUT	BRONZE	
13 CHECK NUT	ST44.2 + ZINC	
14 HANDWHEEL	STEEL	
15 NUT	STEEL	
16 HOOD	STEEL	
17 TOP CAP	PLASTIC	

Table. 1

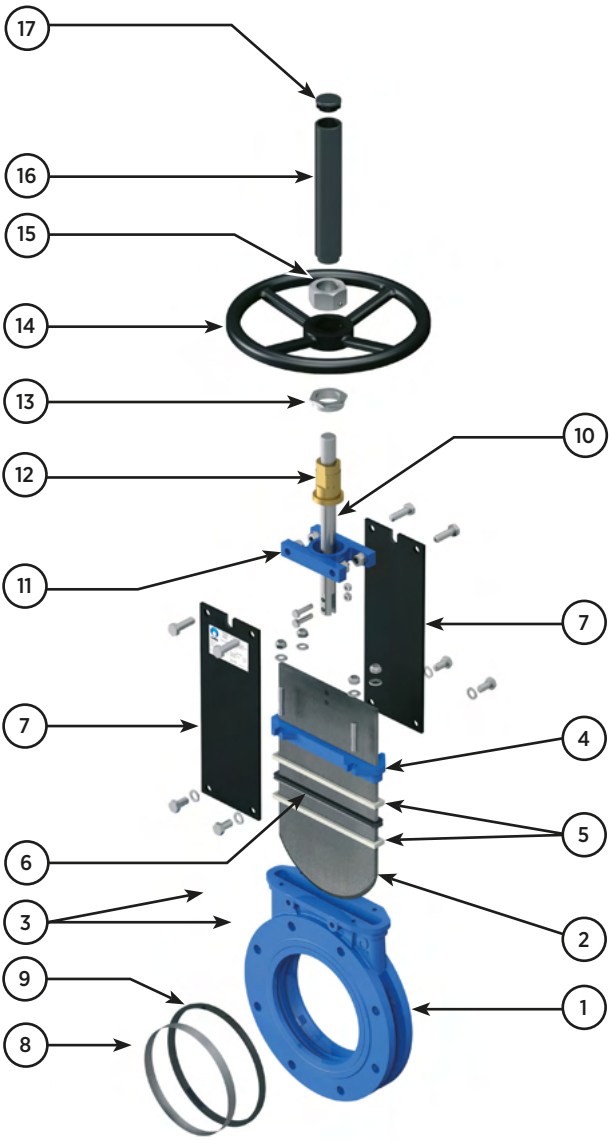


Fig. 2

DESIGN CHARACTERISTICS

1. BODY

- Unidirectional wafer-design knife gate valve. One-piece cast body with guides to support gate and seat wedges.
- For diameters greater than DN1400 the body is machine-welded with the necessary reinforcements to resist the maximum working pressure. Full port designed to provide high flow rates with low pressure drop.
- Full port designed to provide high flow rates with low pressure drop. El diseño interno del cuerpo evita el almacenaje de los sólidos en la zona del cierre.
- The standard manufacturing materials are GJS500-7 cast iron and CF8M stainless steel. Other materials, such as nodular cast iron, A216WCB carbon steel and stainless steel alloys (AISI316Ti, Duplex, 254SMO, Uranus B6...) are available on request. (AISI316Ti, Dúplex, 254SMO, Uranus B6...) están disponibles bajo consulta.
- As standard, iron or carbon steel valves are painted with an anti-corrosive protection of 80 microns of EPOXY (colour RAL 5015). Other types of anti-corrosive protections are available on request.

2. GATE

The standard manufacturing materials are AISI304 stainless steel in valves with iron body and AISI316 stainless steel in valves with CF8M body. Other materials or combinations can be supplied on request. The gate is polished on both sides to provide a smooth contact surface with the resilient seat. At the same time, the gate is rounded to prevent the seat from being cut. Different degrees of polishing, antiabrasion treatments and modifications are available to adapt the valves to the customer's requirements.

3. SEAT

Six types of seats are available according to the working application:

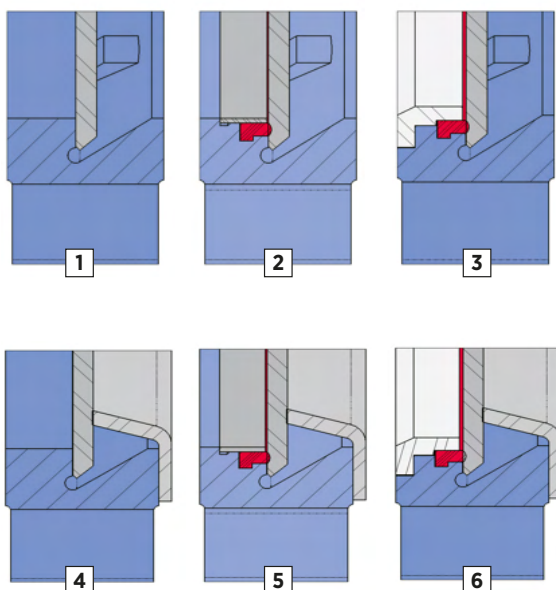


Fig. 3

RESILIENT SEAT MATERIALS

EPDM

This is the standard resilient seat fitted on **CMO valves**. It can be used in many applications, however, it is generally used for water and products diluted in water at temperatures no higher than 90°C (*see note). It can also be used with abrasive products and it provides the valve with 100% watertight integrity.

NITRILE

It is used in fluids containing fats or oils at temperatures no higher than 90°C (*see note). It provides the valve with 100% watertight integrity.

FKM

Suitable for corrosive applications and continuous high temperatures of up to 190°C and peaks of 210°C. It provides the valve with 100% watertight integrity.

SILICONE

Mainly used in the food industry and for pharmaceutical products with temperatures no higher than 200°C. It provides the valve with 100% watertight integrity.

PTFE

Suitable for corrosive applications and pH between 2 and 12. Does not provide the valve with 100% watertight integrity. Estimated leakage: 0.5% of the tube flow.

***Note:** EPDM and Nitrile is possible up to max temp.: 120°C to order.

SEAT 1

Metal / metal seat.

This type of seat does not include any kind of resilient seat and the estimated leakage (considering water as the test fluid) is 1.5% of the pipe flow.

SEAT 2

Standard soft-seated valve

This type of seat includes a resilient seat which is fixed to the inside of the body via an AISI316 stainless steel retaining ring.

SEAT 3

Soft-seated valve with reinforced socket.

This type of seat includes a resilient seat which is fixed to the inside of the body via an AISI316 stainless steel retaining ring with two functions (to protect the valve from abrasion and clean the gate when working with solids that can stick to it)

SEAT 4 / 5 / 6


The same as seats 1, 2 and 3 but including a deflector.

The deflector is a cone-shaped ring located at the valve's entrance with two functions (to protect the valve from abrasion and guide the flow to the centre of the valve).

Note: In some applications other types of resilient materials are used, such as hypalon, butile or natural rubber.

4. PACKING

CMO Valves's standard packing is composed of three lines with a specially designed EPDM O-ring in the middle which provides watertight integrity between the body and the gate, preventing any type of leakage to the atmosphere. It is located in an easily accessible place and can be replaced without dismantling the valve from the pipeline. Below we indicate various types of packing available according to the application in which the valve is located:

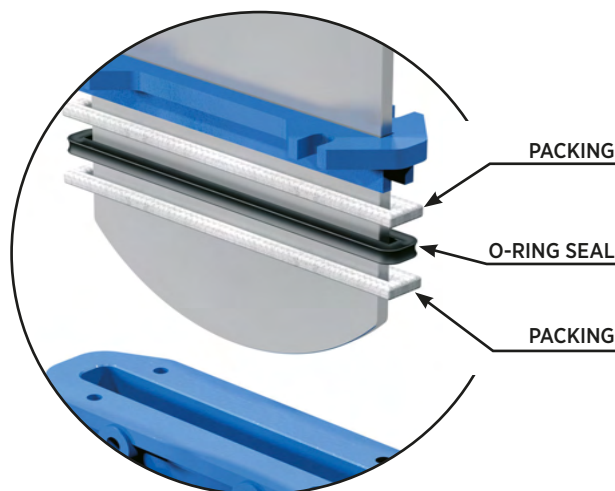

1. SYNTHETIC + PTFE

This packing is composed of braided synthetic fibres soaked in PTFE both inside and out. It is for general use in hydraulic applications in both pumps and valves and in all types of fluids, especially corrosive ones, including concentrated and oxidising oils. It is also used in liquids with solid particles in suspension.

2. GREASED COTTON

This packing is composed of braided cotton fibres soaked in grease both inside and out. It is for general use in hydraulic applications in both pumps and valves.

3. DRY COTTON

This packing is composed of cotton fibres. It is for general use in hydraulic applications with solids.

4. COTTON + PTFE

This packing is composed of braided cotton fibres soaked in PTFE both inside and out. It is for general use in hydraulic applications in both pumps and valves.

5. GRAPHITE

This packing is composed of high-purity graphite fibres. A diagonal braiding system is used and it is impregnated with graphite and lubricant which helps to reduce porosity and improve operation. It has a wide range of applications as graphite is resistant to steam, water, oils, solvents, alkali and most acids.

6. CERAMIC FIBRE

This packing is composed of ceramic material fibres. Its main applications are with air or gas at high temperatures and low pressures.

SEAT/SEALS			PACKING			
MATERIAL	Tª MÁX (°C)	APLICACIONES	MATERIAL	P(Bar)	Tª. MÁX	pH
Steel/Steel	>250º	High temp./Low watertight integ	Greased cotton	10	100º	6-8
EPDM (E)	90º (*see note)	Non-mineral acids and oils	Dry cotton	0.5	100º	6-8
Nitrile (N)	90º (*see note)	Hydrocarbons, oils and greases	Cotton + PTFE	30	120º	6-8
FKM (V)	200º	Hydrocarbons and solvents	Synthetic + PTFE	100	-200º + 270º	0-14
Silicone (S)	200º	Food Products	Graphite	40	650º	0-14
PTFE (T)	250º	Corrosion resistant	Ceramic Fibre	0.3	1400º	0-14

* **EPDM and Nitrile:** it is possible up to Tª Max: 120°C on request
Note: More details and other materials on request

Table. 2

5. STEM

The stem on the **CMO Valves** valve is made of AISI 304 stainless steel. This characteristic provides high resistance and excellent corrosion-resistant properties. The valve design can be rising stem or non-rising stem. When rising stem is required a stem hood is supplied to protect the stem from contact with dust and dirt, as well as keeping it lubricated.

6. PACKING GLAND

The packing gland allows uniform force and pressure to be applied to the packing to ensure watertight integrity. As standard, valves with cast iron body include GJS500-7 packing glands, whilst valves with stainless steel body have CF8M packing glands.

7. ACTUATORS

All types of drives to operate the **AD series** knife gate valve can be supplied according to the customer’s requirements: Thanks to the design of **CMO Valves**, our fully interchangeable system enables customers to independently replace the drive without needing extra mounting accessories, both simply and quickly.

Manual Drives

Handwheel (*)
Chain handwheel (*)
Lever
Geared motor (*)
Others (square stem)

Availability of Accessories

Mechanical stoppers
Locking devices
Emergency manual drives
Electrovalves
Positioners
Limit switches
Proximity detectors
Straight floor stand (fig. 4)
Leaning floor stand (fig. 5)

Automatic Drives

Electric actuator (*)
D/E & S/E pneumatic cylinder
Hydraulic cylinder

(*) Available in rising and non-rising stem versions.



LEANING FLOOR STANDS.



STRAIGHT FLOOR STANDS.

For applications where the valve drive needs to be moved away, **CMO Valves** provides extension stems and spindle extensions so the knife gate valve can be operated from positions distant from the valve’s location. Please ask our engineers beforehand.

H/A = RISING STEM
H/NA = NON-RISING STEM



LEVER	HANDWHEEL	HANDWHEEL	CHAIN	ELECTRIC-MOTOR	HANDWHEEL	HYDRAULIC	PNEUMATIC	SINGLE-ACTING
H/A	NON-RISING	RISING STEM	HANDWHEEL	ACTUATOR	GEAR-BOX	ACTUATOR	ACTUATOR	PNEUMATIC
	STEM	H/A	H/A	H/A	H/A	H/A	H/A	ACTUATOR
	H/NA		H/NA	H/NA	H/NA			H/A

ACCESSORIES AND OPTIONS

Limit switches or detectors to indicate valve positions (open/closed and/or intermediate positions), and position transmitters to indicate continuous position.

PTFE LINED GATE

The steel provides the mechanic resistance to the chopper while the PTFE or PPFA coating isolates the metal corrosive medium, providing a high chemical and abrasion resistance. This way maintenance periods are reduced and the valve's lifespan is highly increased.

STELLITED GATE

Stellite is added to the lower perimeter of the cutter to harden its surface, increasing its resistance to abrasion, heat, impact and corrosion, or their combinations.

SCRAPER IN THE PACKING:

Its function is to clean the knife gate during the opening movement and prevent possible damage to the packing.

AIR INJECTION IN THE PACKING GLAND

Through the injection of air in the packing gland, an air gasket that enhances the watertightness is created, prevents leaks and reduces friction and wear.

DRIVE OR YOKE SUPPORT:

Made of EPOXY-coated steel (or stainless steel to order), its robust design gives it great rigidity in order to withstand the most adverse operation conditions.

MECHANICAL LIMIT SWITCHES, INDUCTIVE SWITCHES AND POSITIONERS

Race endings or detectors for valve positions indicator (open/closed and/or intermedium positions), and and position transmitters for continuous position indication.

ELECTROVALVES:

For air distribution to pneumatic drives.

CONNECTION BOXES, WIRING AND PNEUMATIC PIPING

Fully assembled units can be supplied with all the necessary accessories.

MECHANICAL STROKE LIMITING STOP (MECHANICAL STOPPERS):

These allow the stroke to be mechanically adjusted, limiting the valve run.

MECHANICAL LOCKING DEVICE:

Allows the valve to be mechanically locked in a fixed position.

EMERGENCY MANUAL ACTUATOR (HAND WHEEL /GEAR BOX)

Allows the manual operation of the valve in the event of power or air failure.

ACTUATOR INTERCHANGEABILITY

The actuators are easily interchangeable with each other, especially in those applications where future motorizations are foreseen.

EPOXY COATING:

All cast-iron and carbon steel valve bodies and components are EPOXY coated, making the valves hugely resistant to corrosion while giving them an excellent finish.

The standard colour in **CMO Valves** is blue, RAL-5015.

SAFETY GUARDS FOR THE KNIFE GATE:

In accordance with European Safety Standards ("EC" marking), automatic valves are equipped with metal guards for protection, preventing any objects from being accidentally caught or dragged along in the knife gate's run.

FLUSHING HOLES IN BODY

Several holes can be drilled in the body to flush air, steam or other fluids out in order to clean the valve seat before sealing



Fig. 7

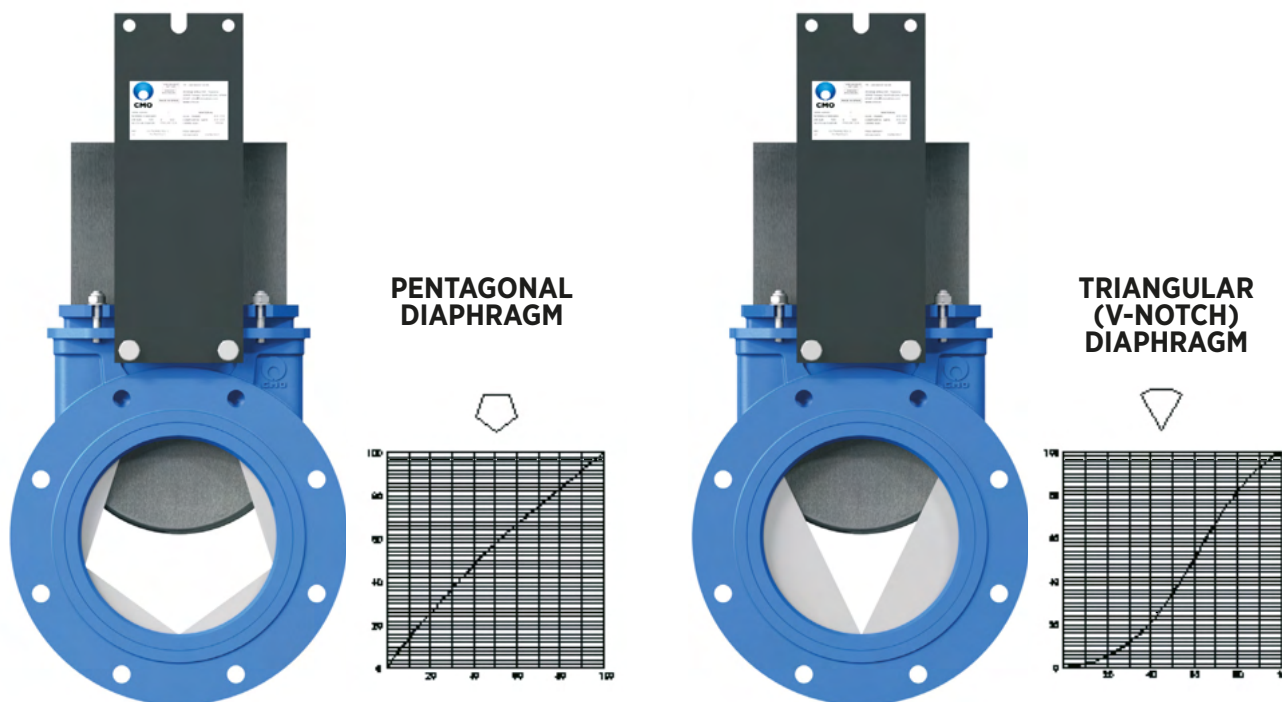


Fig. 8

VERTICAL
% MAXIMUM FLOW

HORIZONTAL
% VALVE OPENING

PENTAGONAL AND V-SHAPED DIAPHRAGM WITH INDICATION RULER

This option is intended for applications requiring flow regulation. Allows flow control according to the valve's opening percentage. The valve's response can be characterised by the diaphragm's design (V-shaped, pentagonal, etc.). Check with **CMO Valves** for further information on characteristic and inherent curves.

DRIVE INTERCHANGEABILITY

The drives are easily interchangeable, especially in applications anticipating future motorisation.

EPOXY COATING:

All cast iron and carbon steel valve bodies and components are coated with a layer of EPOXY, which makes the valves highly resistant to corrosion and provides an excellent surface finish.

The standard colour of **CMO Valves** is blue, RAL 5015. Other colours and/or finishes upon request.

KNIFE GATE SAFETY GUARDS

In accordance with European Safety Standards ("CE" marking), the automatic valves are equipped with metal guards for protection, isolating the moving parts in the knife gate's travel and preventing anyone or anything from being accidentally caught or dragged along.

TYPES OF EXTENSIONS

For those applications where it is required to distance the drive from the valve, **CMO Valves** provides various solutions (mounting supports, extension shafts and spindle extensions) that allow the actuation of the knife gate valve from positions remote from the valve location.

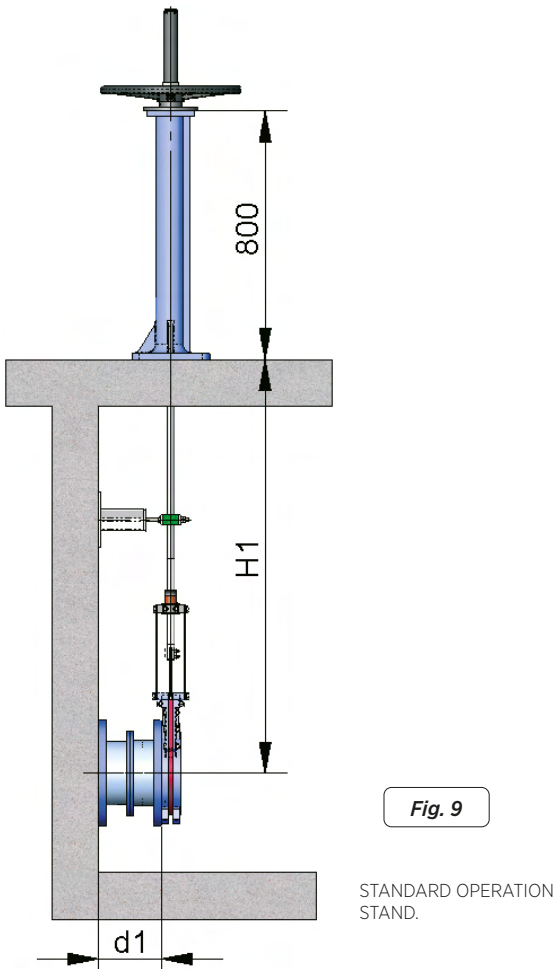


Fig. 9

STANDARD OPERATION STAND.




Fig. 10

STEM GUIDE BRACKET

LISTA DE COMPONENTES

COMPONENTE	VERSIÓN ESTANDAR
Husillo	AISI 304
Vástago	AISI 304
Soporte-Guía	Acero al carbono con recubrimiento de EPOXI
Deslizadera	PA6
Columna	GJS500-7 con recubrimiento EPOXI

Table. 3

1- FLOOR STAND

This extension is done by coupling a spindle to the stem. The desired extension is achieved by defining the length of the spindle. A floor stand is normally installed to support the drive.

The definition variables are as follows:

H1 = Distance from valve centre to base of the stand

d1 = Separation from the wall to the end of the connecting flange

CHARACTERISTICS:

- It can be coupled to any type of drive.
- We recommend a stem guide bracket every 1.5 m
- The standard floor stand is 800 mm high.
- Option to use a position indicator to determine the valve's percentage of opening.
- Leaning stand available to order
- Other floor stand measurements available on request.



LEANING STAND.

Fig. 11

2.- PIPE

This consists of raising the actuator. The pipe will rotate in the same direction as the wheel when the valve is operated. The valve always remains at the same height. Designed for valves with non-rising stems NA.

The definition variables are as follows:

H1 = Distance from valve centre to base of the stand

d1 = Separation from the wall to the end of the connecting flange

CHARACTERISTICS:

- Standard drives: handwheel and top square.
- A pipe guide bracket is recommended every 1.5 m.
- The standard materials are: EPOXY-coated carbon steel and stainless steel.

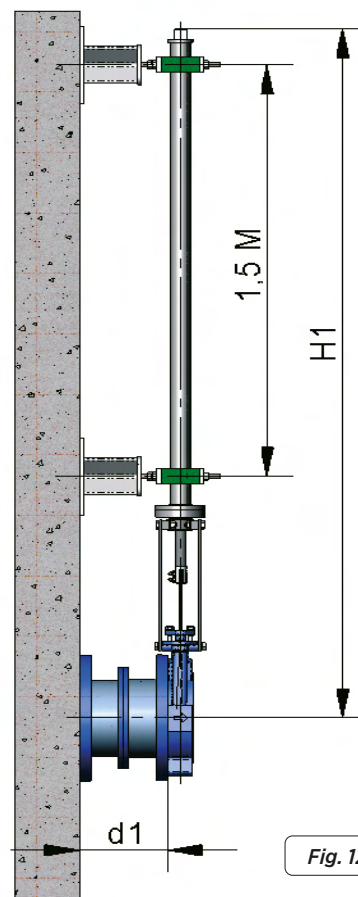


Fig. 12

3.- ELONGATED SUPPORT PLATES

This solution is suitable for small extensions and involves extending the support plates. An intermediate yoke can be fitted to reinforce the support plate structure. It is commonly used as a technical solution to distance the drive from the valve body and piping when exposed to high temperatures.



Fig. 13

4.- UNIVERSAL CARDAN JOINT

This solution suits situations where the valve stem misaligns with the drive. A universal joint or cardan coupling connects the valve stem to the drive shaft, which is mounted on a remote floor stand.



Fig. 14

RISING-STEM HANDWHEEL

The definition variables are as follows:

- B = Max. width** of the valve (without drive).
- P = Max. height** of the valve (without drive).

OPTIONS:

- Locking devices.
- Extensions: stand, pipe, plates.
- DN above those given in the table

ACTUATOR:

- Handwheel
- Stem
- Nut
- Stem protection bonnet

AVAILAIBLE:

- NDN80 a DN1200.
- From ND600 the actuator is with gears.

** Other ND on request.*

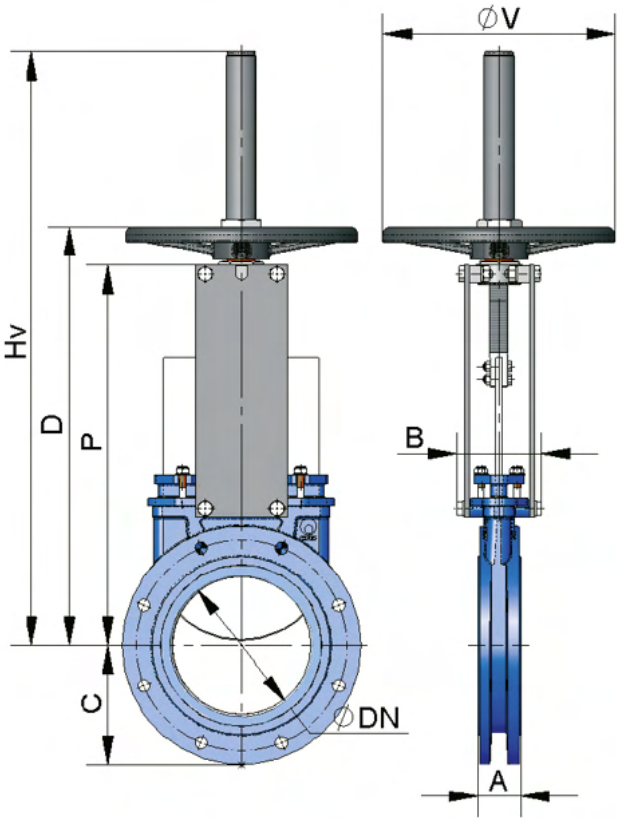


Fig. 15

ND	ΔP (bar)	A	B	C	P	Hv	D	øV	WEIGHT (kg.)
80	10	50	92	100	294	469	333	225	12
100	10	50	92	114,5	334	502	373	225	14
125	10	50	102	127	367	585	406	225	17
150	10	60	102	142,5	419	644	458	225	21
200	10	60	119	171,5	525	815	578	325	32
250	10	70	119	203	626	1016	679	325	50
300	6	70	119	242,5	726	1116	779	380	70
350	6	96	290	267,5	797	1336	906	450	112
400	6	100	290	297,5	903	1442	1012	450	138
450	5	106	290	320	989	1628	1098	450	188
500	4	110	290	357,5	1101	1738	1210	450	219
600	4	110	290	420	1307	2046	1416	450	300
700	3	110	320	455	1506	--	--	--	483
800	3	110	320	505	1720	--	--	--	616
900	3	110	320	585	1953	--	--	--	790
1000	3	110	320	615	2137	--	--	--	983
1200	3	150	340	730	2616	--	--	--	1420

Table. 4



HANDWHEEL WITH NON-RISING STEM

Suitable when no size limitations exist.

The definition variables are as follows:

B = Max. width of the valve (without drive).

P = Max. height of the valve (without drive).

OPTIONS:

- Square nut
- Locking devices
- Extensions: elongated plates...
- ND higher than those give in the table

ACTUATOR:

- Handwheel
- Stem
- Guide bearings on the yoke.
- Nut

AVAILABLE:

- ND80 to ND1200.
- From ND600 the actuator is with gears

* Other ND on request.

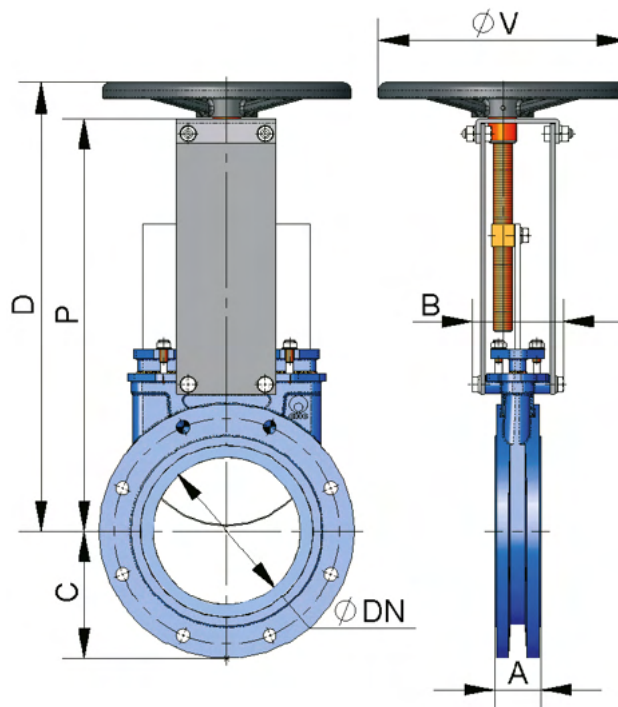


Fig. 16

ND	ΔP (bar)	A	B	C	P	D	øV	WEIGHT (kg.)
80	10	50	101	100	294	333	225	12
100	10	50	101	114,5	334	373	225	14
125	10	50	111	127	367	407	225	17
150	10	60	111	142,5	419	458	225	21
200	10	60	128	171,5	525	578	325	34
250	10	70	128	203	626	679	325	50
300	6	70	128	242,5	726	779	380	67
350	6	96	305	267,5	797	906	450	111
400	6	100	305	297,5	903	1012	450	148
450	5	106	305	320	989	1098	450	186
500	4	110	305	357,5	1101	1210	450	221
600	4	110	305	420	1307	1416	450	300
700	3	110	335	455	1506	--	--	477
800	3	110	335	505	1720	--	--	628
900	3	110	335	585	1953	--	--	794
1000	3	110	335	615	2137	--	--	987
1200	3	150	355	730	2616	--	--	1420

Table. 5

CHAIN HANDWHEEL

Widely used in raised installations with difficult access, the wheel is fitted in vertical position.

The definition variables are as follows:

B = Max. width of the valve (without actuator)

OPTIONS:

- Extensions: elongated plates...
- DN higher than those give in the table
- Non-rising stem

ACTUATOR:

- Handwheel
- Stem
- Nut
- Hood
- Chain

AVAILABLE:

- ND80 to DN1200.
- From ND600 the actuator is with gears.

** Other ND on request.*

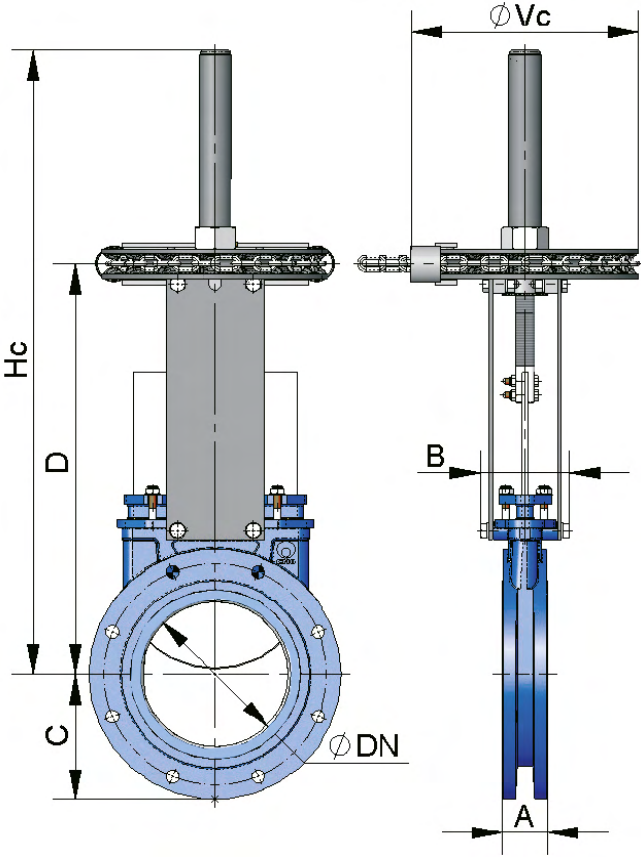


Fig. 17

DN	ΔP (bar)	A	B	C	D	Hc	øVc	WEIGHT (kg.)
80	10	50	92	100	317	469	225	12
100	10	50	92	114,5	357	502	225	14
125	10	50	102	127	390	585	225	17
150	10	60	102	142,5	442	644	225	21
200	10	60	119	171,5	551	815	300	34
250	10	70	119	203	652	1016	300	50
300	6	70	119	242,5	752	1116	300	67
350	6	96	290	267,5	879	1336	402	111
400	6	100	290	297,5	985	1442	402	148
450	5	106	290	320	1071	1628	402	186
500	4	110	290	357,5	1183	1738	402	221
600	4	110	290	420	1389	2046	402	300
700	3	110	320	455	1506	2406	402	477
800	3	110	320	505	1720	2790	402	628
900	3	110	320	585	1953	3130	402	794
1000	3	110	320	615	2137	3440	402	987
1200	3	150	340	730	2616	4050	402	1420

Table. 6



LEVER

It is a fast actuator.

The definition variables are as follows:

- B = Max. width** of the valve (without actuator)
- P = Max. height** of the valve (without actuator)

OPTIONS:

- Locking devices
- Extensions: elongated plates...

ACTUATOR:

- Lever
- Rod
- Guide bearing
- External limiting switches to maintain the position

AVAILABLE:

- ND80 to DN300.

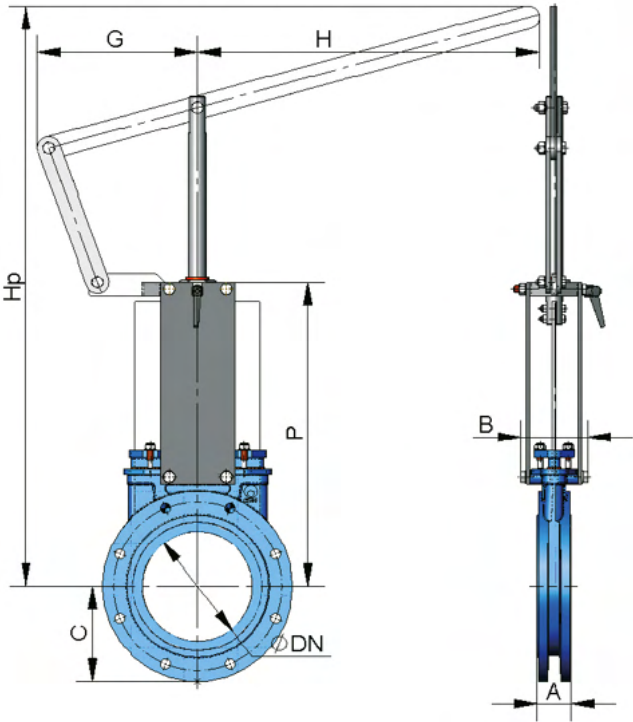


Fig. 18

DN	ΔP (bar)	A	B	C	P	G	H	Hp	WEIGHT (kg.)
80	10	50	92	100	317	155	325	549	13
100	10	50	92	114,5	357	155	325	605	14
125	10	50	102	127	390	155	425	902	18
150	10	60	102	142,5	442	155	425	956	20
200	10	60	119	171,5	551	290	620	1027	37
250	10	70	119	203	652	290	620	1416	64
300	6	70	119	242,5	752	290	620	1525	71

Table. 7

GEAR BOX

This is recommendable for DN's greater than 600.

The definition variables are as follows:

B = Max. width of the valve (without drive).

P = Max. height of the valve (without drive).

OPTIONS:

- Chain handwheel.
- Locking devices.
- Extensions: stand, pipe, plates, etc.
- Non-rising stem.
-

ACTUATOR:

- Stem
- Yoke
- Cone-shaped gear box
- Handwheel
- Standard ratio = 4 to 1.

AVAILABLE:

- ND80 to DN1200.

** Other ND on request.*

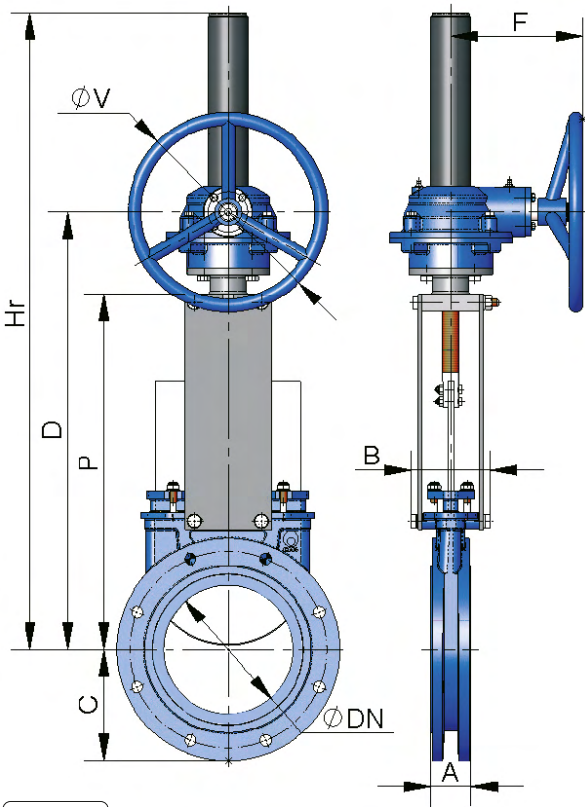


Fig. 19

ND	ΔP (bar)	A	B	C	P	D	F	øV	Hr	WEIGHT (kg.)
80	10	50	92	100	294	418	198	300	592	21
100	10	50	92	114,5	334	458	198	300	632	23
125	10	50	102	127	367	491	198	300	665	28
150	10	60	102	142,5	419	543	198	300	717	30
200	10	60	119	171,5	525	648	198	300	942	55
250	10	70	119	203	626	749	198	300	1043	73
300	6	70	119	242,5	726	850	198	300	1194	91
350	6	96	290	267,5	797	891	218	450	1335	124
400	6	100	290	297,5	903	997	218	450	1441	156
450	5	106	290	320	989	1083	218	450	1677	199
500	4	110	290	357,5	1101	1195	218	450	1789	244
600	4	110	290	420	1307	1401	218	450	2045	320
700	3	110	320	455	1506	1612	260	450	2401	472
800	3	110	320	505	1720	1825	288	650	2715	663
900	3	110	320	585	1953	2055	288	650	3043	822
1000	3	110	320	615	2137	2246	288	650	3351	1034
1100	3	150	340	670	2375	2515	352	850	3675	1207
1200	3	150	340	730	2616	2760	352	850	4042	1368

Table. 8



DOUBLE-ACTING PNEUMATIC CYLINDER

The definition variables are as follows:

B = Max. width of the valve (without drive).

- 10 bar is the maximum admissible air pressure. For air pressures below 6 bar please consult to **CMO Valves**.
- For ND80 to ND200 valves, the cylinder's jacket and covers are made of aluminium, the rod of AISI304, the piston of rubber-coated steel and the O-ring seals are made of nitrile.
- For valves larger than ND200 the covers are made of nodular cast iron or carbon steel.
- On request, we can also supply the actuator made entirely of stainless steel, especially for installation in corrosive atmospheres.

AVAILABLE:

- ND80 to DN1200.

* Other ND on request.

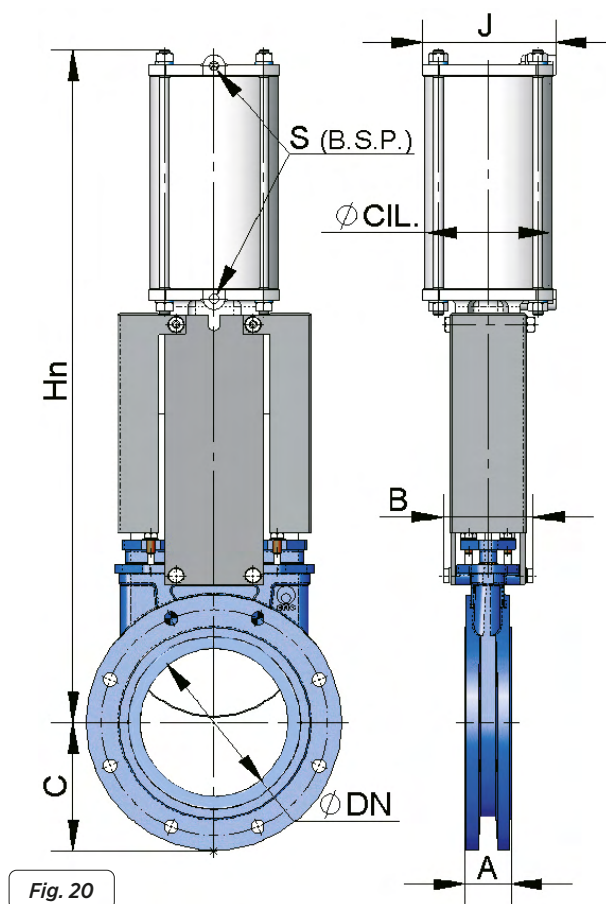


Fig. 20

ND	ΔP (bar)	A	B	C	Ø CIL.	Ø VAST	J	S (B.S.P.)	Hn	WEIGHT (kg.)
80	10	50	92	100	80	20	96	1/4"	498	12
100	10	50	92	114,5	100	20	115	1/4"	565	15
125	10	50	102	127	125	25	138	1/4"	636	22
150	10	60	102	142,5	125	25	138	1/4"	717	26
200	10	60	119	171,5	160	30	175	1/4"	874	41
250	10	70	119	203	200	30	218	3/8"	1036	68
300	6	70	119	242,5	200	30	218	3/8"	1182	86
350	6	96	290	267,5	250	40	270	3/8"	1380	148
400	6	100	290	297,5	250	40	270	3/8"	1530	177
450	5	106	290	320	300	45	382	1/2"	1677	251
500	4	110	290	357,5	300	45	382	1/2"	1839	285
600	4	110	290	420	300	45	382	1/2"	2146	376
700	3	110	320	455	350	45	426	1/2"	2481	598
800	3	110	320	505	350	45	426	1/2"	2798	727
900	3	110	320	585	400	50	508	1/2"	3167	894
1000	Consult	110	320	615	400	50	508	1/2"	3451	1115
1100	Consult	150	340	670	400	50	508	1/2"	3792	1275
1200	Consult	150	340	730	400	50	508	1/2"	4135	1436

Table. 9

SINGLE-ACTING PNEUMATIC CYLINDER

The definition variables are as follows:

B = Max. width of the valve (without actuator)

- The air supply pressure to the pneumatic cylinder is a minimum of 6 bar and a maximum of 10 bar, the air must be dry and lubricated.
- Available for opening or closing in case of failure.
- The jacket is made of aluminium, the covers of nodular cast iron or carbon steel, the rod of AISI304, the piston of rubber-coated steel, the O-ring seals of nitrile and the spring is made of steel.
- The actuator design is spring activated for valves with diameters up to ND300. For larger diameters the actuator contains a double-acting cylinder and an air tank which stores the volume of air necessary to perform the last movement in the event of a fault.

AVAILABLE:

- ND80 to DN300.

* Other ND on request.

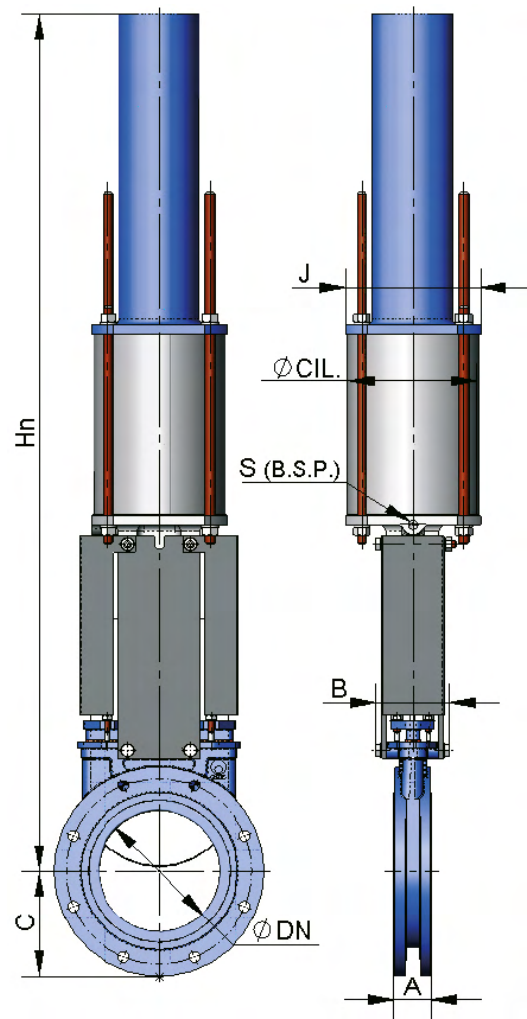


Fig. 21

DN	ΔP (bar)	A	B	C	Ø CIL.	Ø VAST	J	S (B.S.P.)	Hn	WEIGHT (kg.)
80	10	50	92	100	125	25	138	1/4"	833	26
100	10	50	92	114,5	125	25	138	1/4"	873	27
125	10	50	102	127	160	30	175	1/4"	909	39
150	10	60	102	142,5	160	30	175	1/4"	960	40
200	10	60	119	171,5	200	30	218	3/8"	1355	71
250	10	70	290	203	250	40	270	3/8"	1844	140
300	6	70	290	242,5	250	40	270	3/8"	2005	157

Table. 10

ELECTRIC ACTUATOR

The definition variables are as follows:

B = Max. width of the valve (without actuator)

This actuator is automatic and includes the following parts:

- Electric motor
- Stem
- Yoke

The electric motor include:

- Emergency manual handwheel
- Limit switches
- Torque switches

OPTIONS:

- Different types and brands
- Non-rising stem
- ISO 5210 / DIN 3338 flanges

AVAILABLE:

- DN80 to DN 1200
- Possibility to install any brand/manufacturer.
- Different types of controls and a wide range of options. Direct mounting for small DN valve sizes.
- For larger sizes, the electric actuator can be mounted in combination with a gearbox.

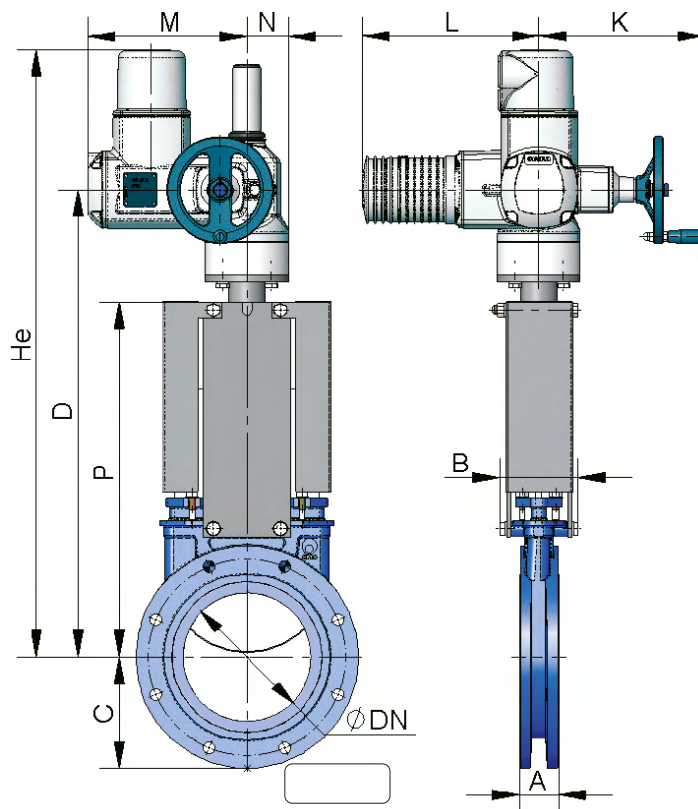


Fig. 22

* Other ND on request.

DN	ΔP (bar)	A	B	C	D	K	L	M	N	P	He	WEIGHT (kg.)
80	10	50	92	100	452	249	265	238	62	294	647	29
100	10	50	92	114,5	492	249	265	238	62	334	687	30
125	10	50	102	127	525	249	265	238	62	367	720	34
150	10	60	102	142,5	577	249	265	238	62	419	772	36
200	10	60	119	171,5	685	249	265	238	62	525	990	47
250	10	70	119	203	785	249	265	238	62	626	1090	65
300	6	70	119	242,5	885	249	265	238	62	726	1190	86
350	6	96	290	267,5	940	254	283	248	65	797	1305	117
400	6	100	290	297,5	1045	254	283	248	65	903	1460	158
450	5	106	290	320	1175	336	389	286	91	989	1755	192
500	4	110	290	357,5	1290	336	389	286	91	1101	1870	273
600	4	110	290	420	1495	336	389	286	91	1307	2045	398
700	3	110	320	455	1661	336	389	286	91	1506	2401	474
800	3	110	320	505	1875	339	389	286	91	1720	2715	678
900	3	110	320	585	2108	339	389	286	91	1953	3043	818
1000	3	110	320	615	2292	339	389	286	91	2137	3351	1060
1100	3	150	340	670	2530	339	389	286	91	2375	3675	1259
1200	3	150	340	730	2760	336	389	528	125	2616	4042	1420

Table. 11

No obligation consultation on dimensions and drawings. Some values will depend on the model and type of electric actuator selected. **CMO Valves** reserves the right to modify them at any time, at its discretion and without prior notice.



HYDRAULIC ACTUATOR

The definition variables are as follows:

B = anchura máx. de la válvula (sin accionamiento).

THE HYDRAULIC ACTUATOR INCLUDES:

- Hydraulic cylinder
- Yoke

PRESIÓN DE ALIMENTACIÓN STANDARD:

- 150 bar.

AVAILABLE:

- ND80 to DN1200.

Bajo consulta, es posible suministrar los accionamientos con calderines de aire con sus dispositivos, para la maniobra del equipo, consulte a CMO Valves para información al respecto.

Opcionalmente, pueden montarse sobre el cilindro neumático S/E una gran variedad de elementos tales como posicionadores, unidad de tratamiento de aire (Filtro/regulador), sensores, etc.

* Other ND on request.

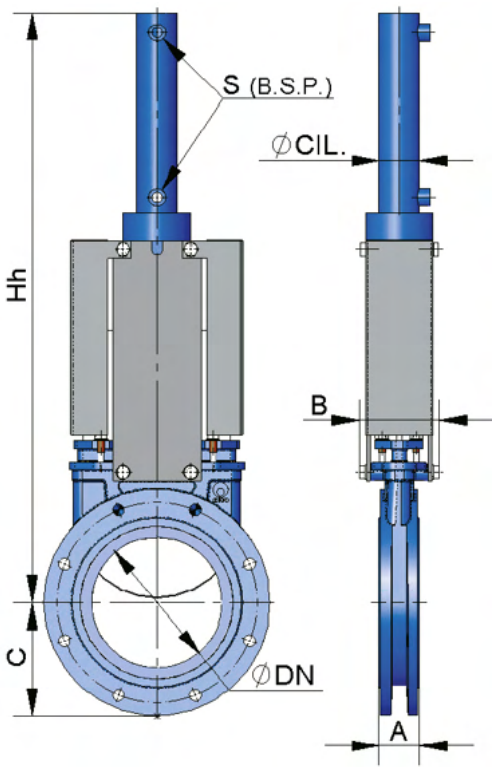


Fig. 23

ND	ΔP (bar)	A	B	C	Hh	Ø CIL	S (B.S.P.)	OIL CAP. (dm³)	Ø ROD	WEIGHT (kg.)
80	10	50	92	100	560	25	3/8"	0.04	18	12
100	10	50	92	114,5	620	32	3/8"	0.09	22	15
125	10	50	102	127	683	32	3/8"	0.11	22	19
150	10	60	102	142,5	755	40	3/8"	0.20	28	24
200	10	60	119	171,5	926	50	3/8"	0.42	28	36
250	10	70	119	203	1077	50	3/8"	0.52	28	54
300	6	70	119	242,5	1245	50	3/8"	0.62	28	76
350	6	96	290	267,5	1376	50	3/8"	0.73	28	118
400	6	100	290	297,5	1535	63	3/8"	1.31	36	160
450	5	106	290	320	1710	63	3/8"	1.47	36	187
500	4	110	290	357,5	1870	63	3/8"	1.62	36	251
600	4	110	290	420	2175	80	3/8"	3.12	45	361
700	3	110	320	455	2525	80	3/8"	3.62	45	523
800	3	110	320	505	2839	100	1/2"	6.44	56	726
900	3	110	320	585	3172	100	1/2"	7.25	56	915
1000	3	110	320	615	3496	125	1/2"	10.25	70	1165
1100	3	150	340	670	3760	125	1/2"	13.56	70	1331
1200	3	150	340	730	4174	125	1/2"	15.05	70	1500

Table. 12

FLANGE DIMENSIONS

EN 1092-2 PN10

ND	●	M (Metric)	P	ØK
80	8	M 16	9	160
100	8	M 16	9	180
125	8	M 16	9	210
150	8	M 20	10	240
200	8	M 20	10	295
250	12	M 20	12	350
300	12	M 20	12	400
350	16	M 20	21	460
400	16	M 24	21	515
450	20	M 24	22	565
500	20	M 24	22	620
600	20	M 27	22	725
700	24	M 27	22	840
800	24	M 30	22	950
900	28	M 30	20	1050
1000	28	M 33	20	1160
1100	32	M 33	20	1270
1200	32	M 36	22	1380

Table. 13

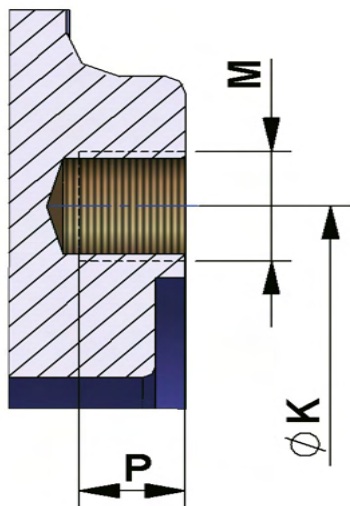


Fig. 25

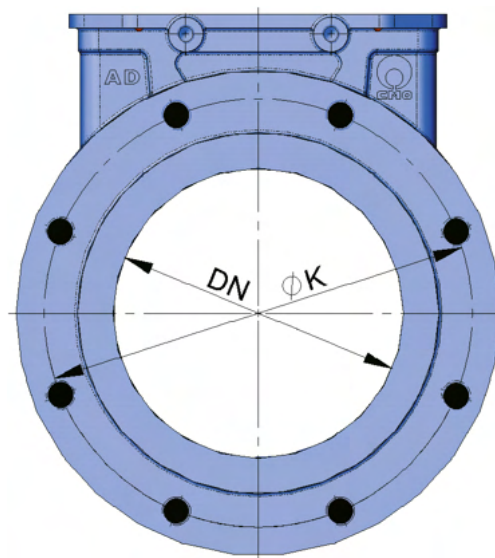


Fig. 24

● TAPPED HOLES

ANSI B16, Class 150

ND	●	M (UNC)	P	ØK
3"	4	5/8"	9	152,4
4"	8	5/8"	9	190,5
5"	8	3/4"	9	215,9
6"	8	3/4"	10	241,3
8"	8	3/4"	10	298,4
10"	12	7/8"	12	361,9
12"	12	7/8"	12	431,8
14"	12	1"	21	476,2
16"	16	1"	21	539,7
18"	16	1 1/8"	22	577,8
20"	20	1 1/8"	22	635
24"	20	1 1/4"	22	749,3
28"	28	1 1/4"	22	863,6
30"	28	1 1/4"	22	914,4
32"	28	1 1/2"	22	977,9
36"	32	1 1/2"	20	1085,8
40"	36	1 1/2"	20	1200,2

Table. 14

As part of its ongoing product and service improvement process, **CMO Valves** reserves the right to alter the data and content of this document at its discretion at any time without notice. The publication of the latest revision renders all previous documents invalid.

Installation and Maintenance Manual available at www.cmovalves.com.



ARNETT

ENGINEERED SOLUTIONS



ARNETT ENGINEERED SOLUTIONS
61 INNOVATION DRIVE, BAMBERG, SC 29003

(844) 785-7585 | SALES@ARNETT.COM

WWW.ARNETT.COM